

# VersaPOD® Cabinets



Siemon's new VersaPOD cabinet system represents the latest generation of VersaPOD cabinets and feature a number of enhancements while maintaining the core functionality, including Siemon's exclusive Zero-U cable management and vertical patching capability. The VersaPOD's combination of additional front-to-back cabinet space and space-saving ZERO-U patching is ideal for high-density data center environments, enabling increased cabling and equipment density while providing excellent accessibility and thermal efficiency.

All of the VersaPOD's unique features are integrated into a full-featured modular enclosure that is equally effective as a standalone network and server cabinet or in a multi-unit bayed configuration, offering a simple, scalable expansion path in any data center.

**Split Side Panels** Provide easy, modular access and feature integrated grounding tabs to ensure proper bonding when installed

**Dual Hinge Doors** — On front and rear of frame providing unobstructed access to both rack mounting and Zero-U space as needed

**Perforated Doors** Feature over 71% airflow to allow proper airflow to equipment while providing a rigid door functionality

**6" Depth** Between mounting rails and cabinet doors allow for superior cable management and accessibility for mounted equipment



**Integrated Cabinet Door Bonding**


Via conductive surfaces at the mating location of the cabinet door and cabinet frame create a grounding path when the doors are installed - eliminating the need for ground wires

**Fully Adjustable Mounting Rails**

Can be readily configured to support any range of equipment depths requirements

**Recessed Corner Posts**

Provide unimpeded cabling access across the entire front, rear and sides of cabinets – even when bayed

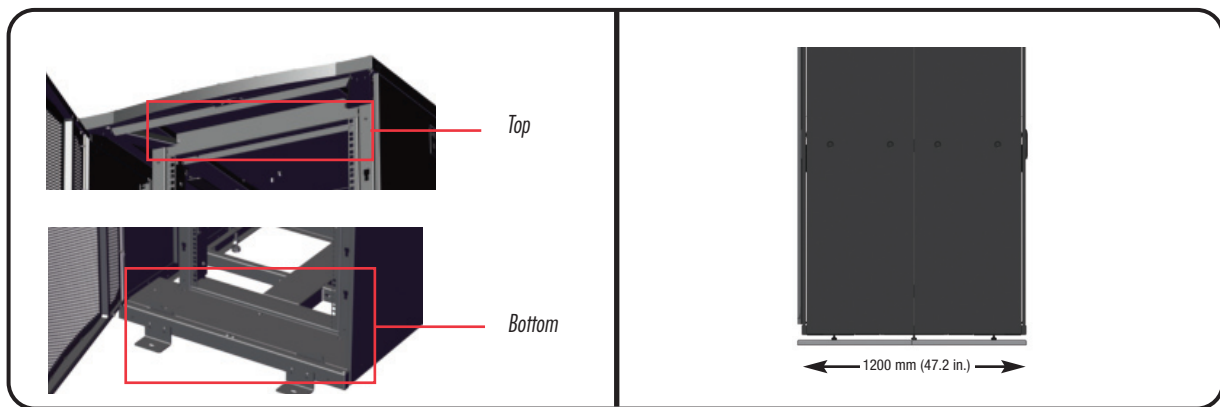


*Airflow Isolation Plates — minimize front-to-back air recirculation at top and bottom of cabinet*

*Compliant Cabinet Depth — The 1200mm (47.2 in.) cabinet is precisely 1200mm deep, allowing for full access to adjacent tiles immediately in front or in back of placed cabinets*

# Ordering Information

## VersaPOD Cabinet

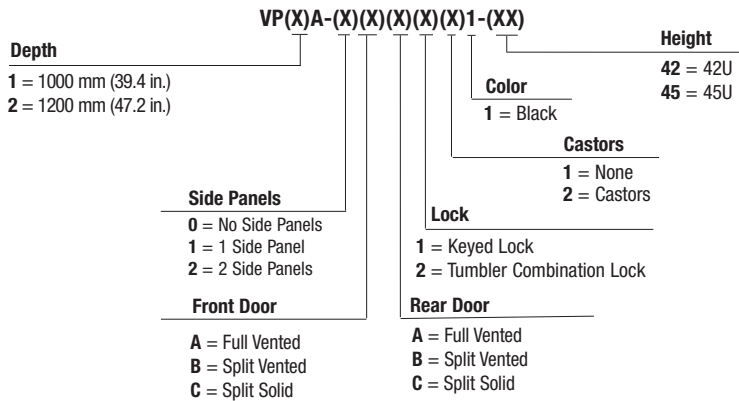

All Cabinets Include:  
 (4) leveling feet,  
 (50) M6 cage nuts  
 (50) M6 screws  
 (2) stabilizing brackets



## VersaPOD Cabinet Specifications

<b>Height*</b>	42U: 2016mm (79.4 in.) 45U: 2150mm (84.6 in.)
<b>Width</b>	762mm (30.0 in.)
<b>Depth</b>	VP1A: 1000mm (39.4 in.) VP2A: 1200mm (47.2 in.)
<b>Weight **</b>	42U VP1A: 143kg (316 lbs.) / VP2A: 157kg (347 lbs.) 45U VP1A: 150kg (331 lbs.) / VP2A: 162kg (358 lbs.)
<b>Usable Depth (Rail-to-Rail) MAX</b>	VP1A: 615mm (24.2 in.) VP2A: 815mm (32.1 in.)
<b>Load Rating</b>	Static: 1361kg (3000 lbs.) Dynamic: 1021kg (2250 lbs.)
<b>Base Type</b>	Open
<b>Color</b>	Black (RAL 9011)
<b>% Door Perforation</b>	71%
<b>U Space Identification</b>	Yes
<b>Lid Cable Access Openings</b>	VP1A: 6 (small); 1 (large) VP2A: 8 (small); 3 (large)
<b>Material</b>	CRS of varying thicknesses
<b>Finish</b>	Textured powder coat
<b>Standards Compliance</b>	UL 60950-1 Ed2.0, CEA-310-E, CSA C22.2 NO. 60950-1-07

\* Nominal height with adjustable leveling feet or castors

\*\* Does not include packaging - add 33kg (72 lbs.) for packaging

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

**Worldwide Headquarters  
North America**  
 Watertown, CT USA  
 Phone (1) 860 945 4200 US  
 Phone (1) 888 425 6165

**Regional Headquarters  
EMEA**  
 Europe/Middle East/Africa  
 Surrey, England  
 Phone (44) 0 1932 571771

**Regional Headquarters  
Asia/Pacific**  
 Shanghai, P.R. China  
 Phone (86) 21 5385 0303

**Regional Headquarters  
Latin America**  
 Bogota, Colombia  
 Phone (571) 657 1950